

Millworks BCLarch® cladding is sourced exclusively from British Columbia, Canada, where the demanding climate imparts natural durability. Sustainably harvested in accordance with PEFC™ practices, BCLarch offers a reliable, environmentally responsible alternative to Siberian Larch.



Attributes


- Origin: Interior British Columbia, Canada
- Certification: PEFC™
- Durability Class: BS EN 350-2 Class 3
- Desired service life (BS8417): Naturally durable. 15+ years
- Moisture content: Kiln dried to 18% (+/-2%)
- Density: 575kg per m³
- Movement group: Small-medium
- Reaction to fire (EN14915): Euroclass B treated with FRX
- Applications: External cladding and fencing

Appearance

BCLarch is similar in appearance to Siberian Larch with a prominent grain pattern characterised by the variation of earlywood to latewood. Consistent in colour and texture, BCLarch ranges from light yellow to slightly darker browns. It is a practical choice for projects where a balance of aesthetics and natural wood features is desired.

Popular profile options

MW1 MW2 MW6 MW7 MW8

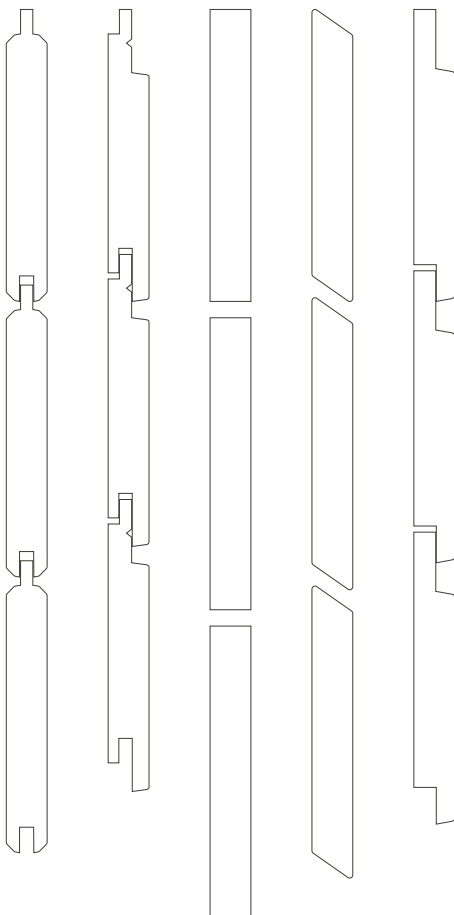

Grading

Millworks B/C Grade timber features a blend of clear, semi-clear and knotty boards and includes timber with Millworks A – C grading characteristics. This grade arises from the natural cutting process and the way the timber 'falls' from the saw, as such allow for some visible knots and irregularities on the shown face. Resin pockets are normal and should not be considered defects. Similar to BS 1186-3 Classes 1 to 3.

Finishes

In addition to our standard planed surface, BCLarch is available in MillTex® and Burned and Brushed surface textures. When left uncoated BCLarch will weather naturally to a silver-grey patina. For accelerated weathering with a consistent finish, OrganoWood® treatment can be factory applied. MillCoat® wood stain can be factory coated for consistent colour and UV protection. We recommend coating BCLarch with lighter colours to reduce heat gain which can result in resin exudation.

Fixing systems

Specifying the correct fixings is critical to the performance of timber cladding. BCLarch is available in secret-fixed profiles to 118mm, however due to the movement class, face-fixing is advised. MillFix® stainless steel screws are available for all Millworks profiles and, when used correctly, ensure a secure fastening to hold the boards in place.