


ICENILarch®

Millworks ICENILarch® is a sustainable, UK-grown larch that offers an alternative to imported species such as Siberian Larch. Sourced exclusively from British forests, ICENILarch is a durable and reliable choice for those seeking a home-grown timber that combines visual appeal with environmental responsibility.

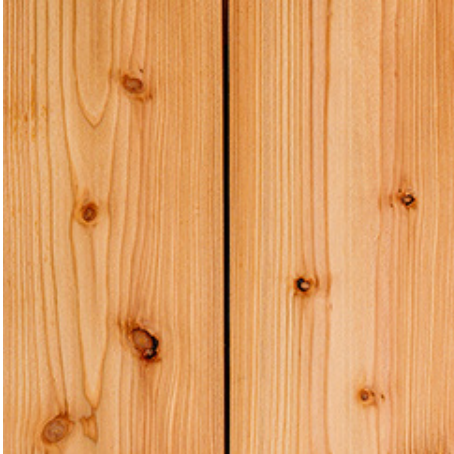

Attributes


- Origin: UK
- Certification: FSC®
- Durability Class: BS EN 350-2 Class 3
- Desired service life (BS8417): Naturally durable. 15+ years
- Moisture content: Air dried to optimum stability
- Density: 570-650kg per m³
- Movement group: Medium-large
- Reaction to fire (EN14915): Euroclass B treated with FRX
- Applications: External cladding

Appearance

UK-grown typically displays a high degree of natural character, including interesting growth ring patterns, knots, and pronounced grain. Its colour varies from pink-brown to creamy-white, making it a popular choice for cladding applications..

Popular profile options

MW6 MW7 MW8 MW12II MW12III

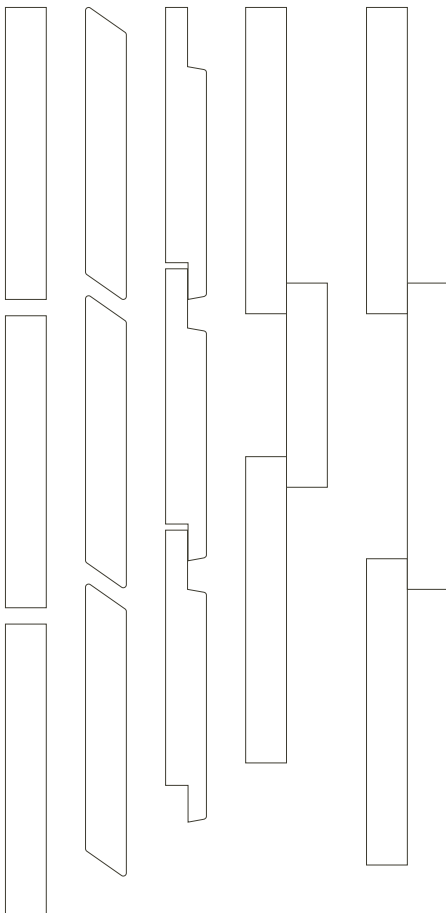

Grading

Millworks C Grade timber features prominent knots, grain variations, and other natural characteristics that are crucial for maintaining the integrity of the board. These visual characteristics are not a reflection of durability or quality and are unlimited in this grade. Millworks C Grade timber is ideal for projects that wish to showcase the timber's natural beauty with visible grain pattern and texture.

Finishes

In addition to our standard planed surface, ICENILarch is available in FineSawn and MillSawn surface finishes. For factory coating, a surface texture is recommended, as it enhances adhesion and optimizes coating performance. MillCoat® wood stain can be factory coated for consistent colour and UV protection. We recommend coating ICENILarch with lighter colours to reduce heat gain which can result in resin exudation. For accelerated weathering with a consistent finish, OrganoWood® treatment can be factory applied.

Fixing systems

Specifying the correct fixings is critical to the performance of timber cladding. ICENILarch is available in a variety of profiles, due to the movement class, face-fixing is recommended. MillFix® stainless steel screws are available for all Millworks profiles and, when used correctly, ensure a secure fastening to hold the boards in place.